



RhinoROC®
Steel Cement Filled Panel



Perf 800/1000

Airflow Panel

RhinoROC® Airflow Panels are manufactured from structural steel technology makes the size and thickness same as Roc Covered panels but light weight. The top surface of the panel is laminated with anti-static HPL or conductive vinyl tiles with numbers of different airflow rates, this resistance welded all-steel panels are the premier choice for computer rooms and data centers.

RHINO®
Strive for perfection!

Panel




- 1 Airflow Rates**
Rates: 15%, 20%, 25%, 30%, 35%, 45%, 50%, 65%
- 2 Bottom Structure**
Thickness: 2.0 mm
Material: Steel rectangular tube welded
- 3 Top Steel-plate**
Thickness: 2.0/2.5 mm
Material: Cold rolled steel sheet
- 4 Finish**
Thickness: Various
Material: Bare, Anti-static HPL, Conductive Vinyl

Description

RhinoROC® Airflow panels are manufactured from structural steel technology makes the size and thickness same as Roc Covered panels but light weight. The top surface of the panel is laminated with anti-static HPL or conductive vinyl tiles with numbers of different airflow rates, this resistance welded all-steel panels are the premier choice for computer rooms and data centers.

Features

- All-steel structural design
- 90% recyclable
- Light weight easy install and removal
- Powder-coated, protective epoxy finish
- Fully interchangeable with other Roc panels

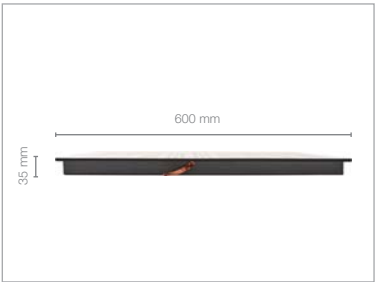


Panel Type	Panel Size	Core Material	Panel Construction	Panel Thickness (Nominal)	System Weight (Typical)
Perf 800	600mm square	2.00 mm	Cold rolled steel welded	35.00 mm	28 kg/m²
Perf 1000	600mm square	2.50 mm	Cold rolled steel welded	35.00 mm	34 kg/m²

Product Ranges

RhinoROC® Airflow

System

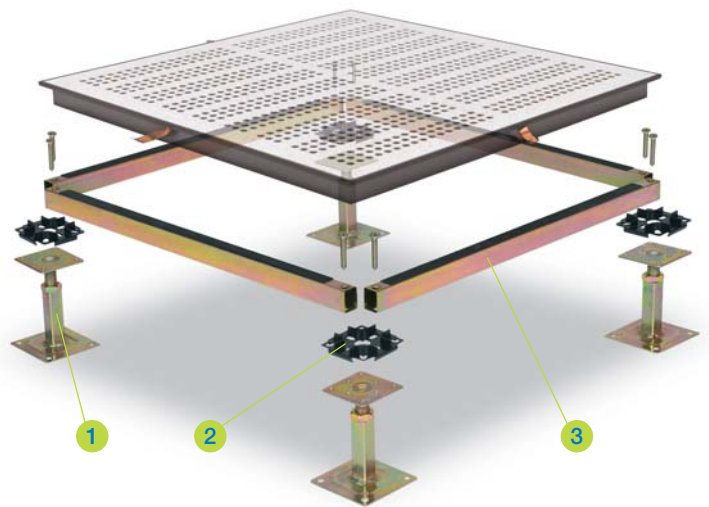

1 Standard Pedestal

Electro-galvanized steel made pedestal is suitable for raised floors with a finished floor height from 150mm to 1800mm. Zinc whisker free is available for special order.
Material: Steel, Yellow Galvanized.


2 Head Gasket

Plastic conductive material with sound proofing and sealing functions, equipped with tabs for the positioning of panels.
Thickness: 2.0mm

3 Stringer

Steel tube performed stringer with plastic gasket on top provide best supports to the structural system with limited air leakage and outstanding acoustic performance.
Dimension: 568mm(L) × 21mm(W) × 32mm(H)
Thickness: 0.8/1.0/1.2mm

Pedestal

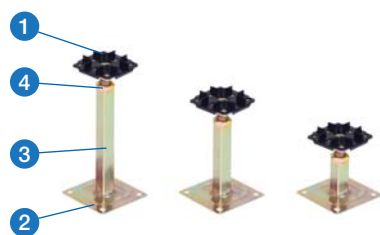

1 Head Assembly

Head plate: 75mm × 75mm × 4.0mm
Threaded rod: M19

2 Base Assembly

Base tube: □22mm × 1.5mm
Base plate: 100mm × 100mm × 2.3mm

3 FFH (Finished Floor Height)

150mm to 1800mm

4 Adjusting Range

+/-25mm (FFH150-600)
+/-30mm (FFH600-1200)
+/-40mm (FFH1200-1800)

Performance

- This bolted stringer system is tested in accordance with USA CISC specification.
- Panel deflection at centre edge must not exceed 2.5mm
- Performance to a safety factor of 3 x static load
- Fire performance 2-hour fire rating according to ASTM E119



Panel Type	Understructure	Performance Grades	Static Loads			Rolling Loads		Airflow (CFM)	
			Concentrated Load	Ultimate Load (Safety Factor* 3.0)	Uniform Load	10 Passes	10,000 Passes	0.05" H ₂ O	0.10" H ₂ O
Perf 800	Bolted Stringer	Medium Duty	800 lbs 3.56 kN	2,400 lbs 10.68 kN	200 lbs/ft ² 10 kN/m ²	Not Recommended		550	800
Perf 1000	Bolted Stringer	Heavy Duty	1,000 lbs 4.45 kN	3,000 lbs 13.34 kN	250 lbs/ft ² 12 kN/m ²	Not Recommended		550	800

**Corporate Headquarters**

111 S.K.V. Building, 4th Floor
Soi Sansabai, Klongton
Klongtoey, Bangkok 10110
Thailand

T/ (662) 661 2990

F/ (662) 661 2991

China Office

593, Tongjiang Road
Jintian Plaza 828-830
Changzhou 213022
Jiangsu, China

T/ (86) 519 8988 3171

F/ (86) 519 8988 3901

Hong Kong Office

Unit 908, 9/F, LT Tower
31 Chong Yip Street
Kwun Tong, Kowloon
Hong Kong

T/ (852) 2865 6816

F/ (852) 2865 6813

Production Unit

Hengshanqiao
Wujin District
Changzhou 213119
Jiangsu, China

T/ (86) 519 8860 7959

F/ (86) 519 8860 5659

www.RhinoAccessFloors.com